

SPECIFICATION SHEET

| | |
|--------------------------------|--|
| SPECIFICATION SHEET NO. | N0429-CD4M000000S001 |
| DATE | April 29, 2021 |
| REVISION | A1 |
| DESCRIPTION | <p>Thru-Hole Ceramic Resonator, L9.5*T4.0*H6.0mm, 3 Pins, Lead: 13.5mm 4.00000MHz, Built-in Capacitance, CRTWS Series Frequency Accuracy ±0.5%, Operating Temp. Range -40°C ~+85°C RoHS/RoHS III compliant Packed in AMNO-Pack, 2000pcs/Tape, 1 Tape/Box</p> |
| CUSTOMER | |
| CUSTOMER PART NUMBER | |
| CROSS REF. PART NUMBER | |
| ORIGINAL PART NUMBER | TGS CRTWS 4.0MG TLF |
| PART CODE | CD4M000000S001 |

| | | | |
|-------------------------|---|--|---|
| VENDOR APPROVE | | | |
| Issued/Checked/Approved |  |  |  |
| DATE: April 29, 2021 | | | |

| | |
|-------------------------|--|
| CUSTOMER APPROVE | |
| | |
| DATE: | |

MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES

MAIN FEATURE

- MHz Thru-Hole Ceramic Resonator, L9.5*T4.0*H6.0mm, Lead: 13.5mm, 3 pins
- Low cost, Built-in load capacitance type.
- Cross more competitors part CSTLS G and more
- RoHS/RoHS III compliant



APPLICATION

- Remote control
- Office equipment and more

PART CODE GUIDE

RFQ
Request For Quotation

| | | | |
|-----------|-----------------|----------|------------|
| CD | 4M000000 | S | 001 |
| 1 | 2 | 3 | 4 |

- 1) CD: Part family Code for MHz Thru-Hole Ceramic Resonator, L9.5*T4.0*H6.0mm, 3 Pins, Lead: 13.5mm CRTWS
- 2) 4M000000: Frequency range code for 4.00000MHz
- 3) S: Packed in AMNO-Pack, 2000pcs/Tape, 1 Tape/Box
- 4) 001 Specification code for original Part No. **TGS CRTWS 4.0MG TLF**


MORE FREQUENCY RANGE AVAILABLE (MHz)

| | | | | | | | | | |
|-------|-------|--|--|--|--|--|--|--|--|
| 2.000 | 4.000 | | | | | | | | |
| | | | | | | | | | |


MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES

DIMENSION (Unit: mm)

Image for reference

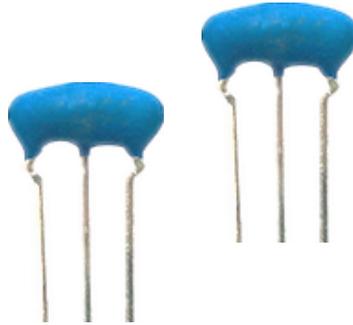

CRTWS

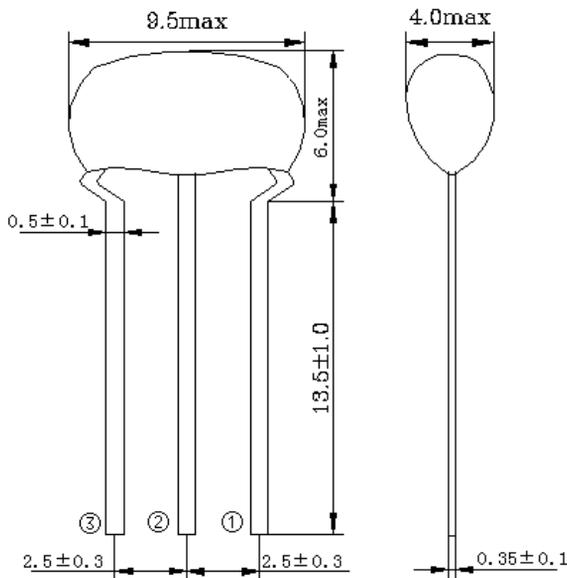


Marking

Frequency Range + QC Code/stamp

Connection

① Input ② Ground ③ Output

Structure

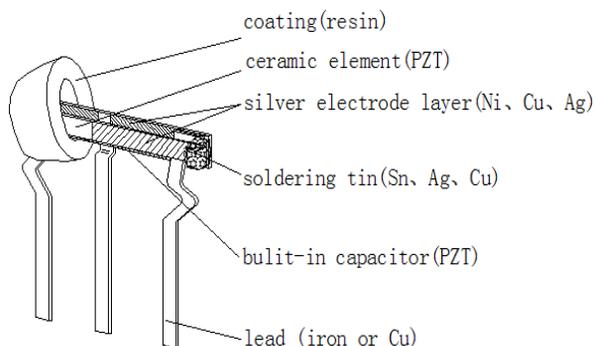

MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES
ELECTRICAL PARAMETERS

| Parameter | Part No. Symbol | Units | Value | | | Condition |
|--|-----------------------|---|---|---------|------|---|
| | | | Min. | Typical | Max. | |
| Original Manufacturer | TGS | TGS Crystals | | | | |
| Holder Type | CRTWS | MHz Thru-Hole Ceramic Resonator L9.5*T4.0*H6.0mm, 3 Pins, Lead: 13.5mm | | | | |
| Frequency Range | 4.0 | MHz | 4.0 | | | |
| Withstanding Voltage | | V | 50 | | | @DC, 1 min |
| Insulation Resistance | | MΩ | 100 | | | @100V, 1 min. |
| Operation Temperature | | °C | -40 | | +85 | |
| Storage Temperature | | °C | -55 | | +85 | |
| Rating Voltage | | V | 10 | | | DC |
| | | | 20 | | | p-p |
| Frequency Accuracy | | % | ±0.5 | | | |
| Resonant Impedance | | Ω | | | 20 | |
| Temperature Coefficient of Oscillation Frequency | | % | | | ±0.3 | Oscillation Frequency drift, -40°C ~ +85°C) |
| Oscillation Frequency Aging Rate (10 years) | | % | | | ±0.3 | From initial value |
| IC Application | | | 1/6TC4069UBPx2 | | | |
| Design Mode | MG | | | | | |
| Built-in Capacitance (C1,C2) | | pF | 30pF±20% | | | |
| Other | Package | T | Packed in AMNO-Pack, 2000pcs/Tape, 1 Tape/Box | | | |
| | RoHS Status | LF | RoHS III compliant | | | |
| | Add Value | | N/A | | | |
| | Internal Control Code | | N/A | | | |

Note: Original Part Number: TGS CRTWS 4.0MG TLF

MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES

RELIABILITY


| Test Items | Test Method And Conditions | Performance Requirements |
|-------------------------------------|---|---|
| Humidity | Subject the resonator at +60°C±2°C and 90%-95% R.H. for 1000h, resonator shall be measured after being placed in natural conditions for 1h. | It shall fulfill the specifications in Table 1. |
| High Temperature Exposure | Subject the resonator to +85°C±2°C for 1000h, resonator shall be measured after being placed in natural conditions for 1h. | It shall fulfill the specifications in Table 1. |
| Low Temperature Exposure | Subject the resonator to -40°C±3°C for 1000h, resonator shall be measured after being placed in natural conditions for 1h. | It shall fulfill the specifications in Table 1. |
| Temperature Cycling | Submit to 100 cycles of the above sequence at condition in air. Time: 30±3 min. @ -40 +/--3°C Time: 30±3 min. @+85 +/--3°C | It shall fulfill the specifications in Table 1. |
| Vibration | Subject the resonator to vibration for 2h each in x y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10Hz-55Hz and then resonator shall be measured. | It shall fulfill the specifications in Table 1. |
| Mechanical Shock | Apply the half-sine shock pulses:981m/s ² ,6ms for 3 times in each direction of three mutually perpendicular planes. | It shall fulfill the specifications in Table 1. |
| Resistance to Soldering Heat | Lead terminals are immersed up to 2 mm from resonator's body in soldering bath of 260°C±5°C for 10s±1s and then resonator shall be measured after being placed in natural conditions for 1h. | It shall fulfill the specifications in Table 1. |
| Solderability | With Rosin-methanol 25% by weight, dip in 230°C±5°C solder(H63A) bath for 3s±0.5s. | More than 95% of the terminal surface of the filter shall be covered with fresh solder. |
| Lead restraint | Apply the force of 5N to the lead in direction of axis and with the load of 2.5N bend the lead through 0°→90°→-90°→0°.. | It shall fulfill the specifications in Table 1. |

Table 1

| Item | Specification after test |
|---|------------------------------------|
| Oscillation Frequency Change $\Delta F_{osc}/F_{osc}$ (%) max | ±0.25 (Refer to the initial value) |
| Resonant Impedance (Ω) max | 30 |
| The limits in the above table are referenced to the initial measurements. | |

MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES

TEST CIRCUIT (For Reference Only)

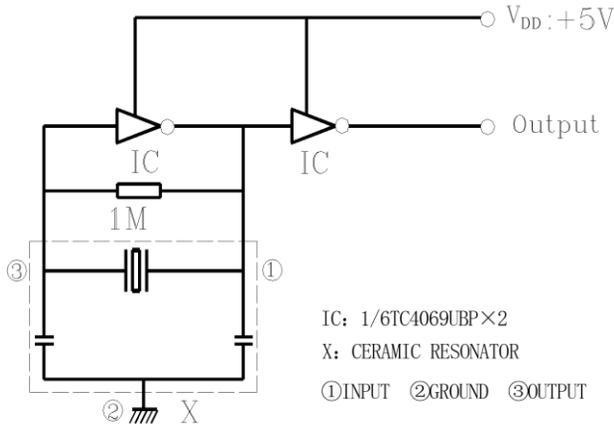

Note:

Parts shall be tested under the condition (Temp.: 20±15°C, Humidity 65±20% R.H.) unless the standard condition (Temp.: 25±3 °C, Humidity :65±10% R.H.) is regulated to measure.




MHZ THRU-HOLE CERAMIC RESONATOR CRTWS SERIES

TAPE AND AMNO-Pack (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-2 and Packed in AMNO-Pack 2000pcs/Tape, 1 Tape/Box



| MARK | SIZE(mm) |
|---------|---|
| P | 12.7±0.5 |
| Po | 12.7±0.2 |
| P1 | 3.85±0.5 |
| P2 | 6.35±1.30 (include the slant of product) |
| F1 | 2.5±0.3 |
| F2 | 2.5±0.3 |
| Wo | 5.5±0.5 |
| W1 | 9.0±0.5 |
| W2 max. | 1.0 |
| W | 18.0±0.5 |
| H | 18.0 |
| H1 | 27.0 max. (Varies with P/N) |
| H2 | 36.0 max. (Varies with P/N) |
| L min. | 3.0 |
| ΦDo | 4.0±0.2 |
| t1 | 0.6±0.2 |
| t2 max | 1.5 |
| Δh max. | 1.0 |

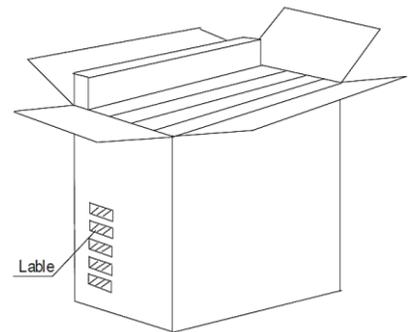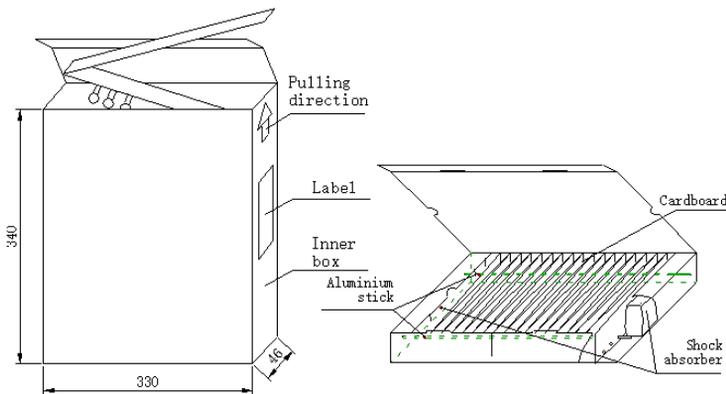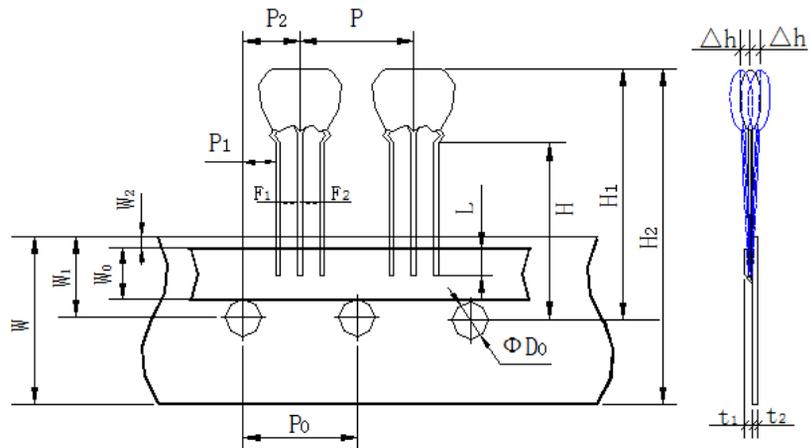

DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.